

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**\* NOTICES \***

**Japan Patent Office is not responsible for any damages caused by the use of this translation.**

1.This document has been translated by computer. So the translation may not reflect the original precisely.

2.\*\*\*\* shows the word which can not be translated.

3.In the drawings, any words are not translated.

---

**Bibliography**

---

(19) [Country of Issue] Japan Patent Office (JP)

(12) [Official Gazette Type] Open patent official report (A)

(11) [Publication No.] JP,2003-305156,A (P2003-305156A)

(43) [Date of Publication] October 28, Heisei 15 (2003. 10.28)

(54) [Title of the Invention] Game machine

(51) [The 7th edition of International Patent Classification]

A63F 5/04 512

[FI]

A63F 5/04 512 C

[Request for Examination] Un-asking.

[The number of claims] 5

[Mode of Application] OL

[Number of Pages] 8

(21) [Filing Number] Application for patent 2002-115589 (P2002-115589)

(22) [Filing Date] April 18, Heisei 14 (2002. 4.18)

(71) [Applicant]

[Identification Number] 390026620

[Name] Yamasa, Inc.

[Address] 362-1, Takao, Niimi-shi, Okayama-ken

(72) [Inventor(s)]

[Name] U.S. product Takayuki

[Address] 362-1, Takao, Niimi-shi, Okayama-ken Inside of Yamasa, Inc.

(74) [Attorney]

[Identification Number] 100118315

[Patent Attorney]

[Name] Kuroda Hiromichi

---

[Translation done.]

**\* NOTICES \***

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1.This document has been translated by computer. So the translation may not reflect the original precisely.

2.\*\*\*\* shows the word which can not be translated.

3.In the drawings, any words are not translated.


## Summary

(57) [Abstract]

[Technical problem] Although it enables it to insert accessories, such as a bill, a coin, and a prepaid card, it is made not to bar a check by looking of display, the game face of a board, etc. in the game machine 10 equipped with the expenditure mouth 70 which a game medium pays out, and the saucer 80 for caught and storing the game medium paid out of this expenditure mouth 70.

[Means for Solution] The slot 90 for accessories which is a slot for inserting accessories into a saucer 80 is formed.

[Translation done.]

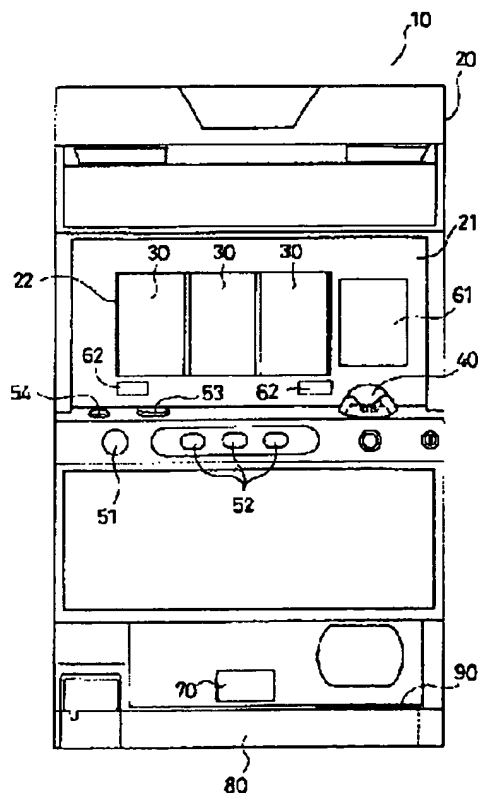

---

[Translation done.]

**\* NOTICES \***

**Japan Patent Office is not responsible for any damages caused by the use of this translation.**

- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.\*\*\*\* shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

---

**CLAIMS**

---

[Claim(s)]

[Claim 1] The game machine characterized by preparing the slot for accessories which is the game machine equipped with the expenditure mouth which a game medium pays out, and the saucer for catching and storing the game medium paid out of this expenditure mouth, and is a slot for inserting accessories into the aforementioned saucer.

[Claim 2] The game machine according to claim 1 characterized by providing the following The aforementioned saucer is a bottom plate. They are much salients for having the side plate which projects towards the upper part from the circumference of this bottom plate, and the accessories inserted in the inner skin of the slot for accessories from opening of the slot top for accessories while the aforementioned slot for accessories was formed so that it might penetrate from the upper surface of a side plate to the undersurface passing through the slot for accessories, and making it not fall from opening of the slot bottom for accessories.

[Claim 3] The aforementioned slot for accessories is a game machine according to claim 1 or 2 characterized by being formed towards the direction of the back where accessories are inserted so that the width of face may become narrow gradually from opening in which accessories are inserted.

[Claim 4] The game machine according to claim 1 characterized by forming the clip for inserting accessories into the aforementioned saucer, and preparing the slot for accessories which is a slot for inserting accessories into this clip.

[Claim 5] It is the game machine according to claim 4 which the aforementioned saucer has a bottom plate and the side plate which projects towards the upper part from the circumference of this bottom plate, the aforementioned clip has the scissors section for inserting accessories, and the stop section stopped by the side plate, and the slot for accessories which is a slot for inserting accessories into the

aforementioned scissors section is prepared, and is characterized by to form the aforementioned stop section in a side plate free [ attachment and detachment ].

---

[Translation done.]

**\* NOTICES \***

**Japan Patent Office is not responsible for any damages caused by the use of this translation.**

1.This document has been translated by computer. So the translation may not reflect the original precisely.

2.\*\*\*\* shows the word which can not be translated.

3.In the drawings, any words are not translated.

---

**DETAILED DESCRIPTION**

---

[Detailed Description of the Invention]

[0001]

[The technical field to which invention belongs] this invention relates to the game machine which enabled it to insert accessories into the saucer of a game medium in more detail about game machines, such as the game machine which performs a game using game media, such as a medal and a sphere, i.e., a slot machine, a pachinko machine, etc.

[0002]

[Description of the Prior Art] From the former, the slot machine, the pachinko machine, etc. are offered as a game machine which performs a game using game media, such as a medal and a sphere. Here, the game in a slot machine is explained. On a slot machine, if the medal as a game medium is thrown in and a start switch is operated after that, rotation of all three rotation reels will begin, and if one of three stop switches is operated after that, rotation of the rotation reel corresponding to the stop switch concerned will stop. And if it finishes operating all three stop switches, rotation of all three rotation reels will stop. If a predetermined pattern stops to a position at this time, it will be winning a prize. And the credit of the medal of number of sheets according to the winning-a-prize mode is carried out, or it pays out of an expenditure mouth. Moreover, the medal paid out of the expenditure mouth is caught and stored by the saucer. And the medal which throws in the medal by which the credit is carried out or is stored by the saucer is thrown in, and a next game is performed.

[0003] By the way, it is necessary to borrow game media, such as a medal and a sphere, and further, in order to advance a game smoothly, it is necessary to prepare

a bill, a coin, a prepaid card, etc. at hand, in order to perform a game with game machines, such as a slot machine and a pachinko machine, so that game media, such as a medal and a sphere, can be borrowed immediately. For this reason, between a front panel and medal input port etc., when it was a slot machine, when it was a pachinko machine, on both sides of the bill, the coin, the prepaid card, etc., the game might be performed between the front windshield and the frame etc. again.

[0004]

[Problem(s) to be Solved by the Invention] However, if it is a slot machine, the various display for telling a game person about injection number of sheets, a lottery result, etc. of a medal will be prepared in a front panel, and if it is a pachinko machine, the game face of a board down which a sphere flows is prepared in the inner part of the front windshield. For this reason, when the bill, the coin, the prepaid card, etc. were inserted between a front panel and medal input port, between the front windshield and the frame, etc., display and the game face of a board might stop being able to be visible easily.

[0005] (Claim 1) Although invention according to claim 1 prepares the bill, the coin, the prepaid card, etc. at hand and enables it to advance a game smoothly by establishing the slot for accessories in a saucer and enabling it to insert accessories, such as a bill, a coin, and a prepaid card, into this slot for accessories, it aims at offering the game machine it was made not to bar a check by looking of display, the game face of a board, etc. there.

[0006] (Claim 2) In addition to the purpose of invention according to claim 1, invention according to claim 2 by establishing the slot for accessories in the side plate of a saucer directly again It enables it to be managed even if it does not increase part mark in establishing the slot for accessories in a saucer. further While making the slot for accessories penetrate from the upper surface of a side plate to an inferior surface of tongue, by preparing much salients in the inner skin of the slot for accessories Although it is made for neither dust nor dust to collect on Mizouchi for accessories, accessories, such as a bill, a coin, and a prepaid card, aim at offering the game machine it was made not to fall from opening of the slot bottom for accessories.

[0007] (Claim 3) Invention according to claim 3 aims at offering the game machine which enabled it to insert certainly various accessories, such as a bill, a coin, a prepaid card, etc. with which thickness differs, again by forming so that the width of face of the slot for accessories may become narrow gradually towards the direction of the back where accessories are inserted in addition to the purpose of invention according to claim 1 or 2.

[0008] (Claim 4) Although part mark increase by invention according to claim 4 forming the clip for inserting accessories into a saucer again in addition to the purpose of invention according to claim 1, and establishing the slot for accessories in this clip, it aims at offering the game machine which enabled it to use the conventional game machine in a form as it is.

[0009] (Claim 5) Further, invention according to claim 5 aims at offering the game machine which removes a clip from a saucer and enabled it to clean Mizouchi for accessories easily, when dust, dust, etc. have collected on Mizouchi for accessories by forming a clip in a saucer free [ attachment and detachment ] in addition to the purpose of invention according to claim 4.

[0010]

[Means for Solving the Problem] (Claim 1) Invention according to claim 1 is the game machine (10) equipped with the saucer (80) for catching and storing the game medium paid out of the expenditure mouth (70) which a game medium pays out, and this expenditure mouth (70), and is characterized by preparing the slot for accessories (90) which is a slot for inserting accessories into the aforementioned saucer (80).

[0011] That is, the game machine (10) concerning this invention establishes the slot for accessories (90) in a saucer (80), and enables it to insert a bill, a coin, a prepaid card, etc. into this slot for accessories (90). Here, as a "game medium", there are a medal, a sphere, etc., for example. Moreover, as "a game machine (10) equipped with the saucer (80) for catching and storing the game medium paid out of the expenditure mouth (70) which a game medium pays out, and this expenditure mouth (70)", there are a slot machine, a pachinko machine, etc., for example.

[0012] Moreover, "an expenditure mouth (70)" is for paying out a game medium. This expenditure mouth (70) can be prepared in the front lower part of a game machine (10). Moreover, "a saucer (80)" is for catching and storing the game medium paid out of the expenditure mouth (70). This saucer (80) is the front lower part of a game machine (10), and can be caudad prepared from an expenditure mouth (70).

[0013] Moreover, as "accessories", there are a bill, a coin, a prepaid card, etc., for example. Moreover, "the slot for accessories (90)" is a slot for inserting accessories. This slot for accessories (90) is established in a saucer (80). Moreover, this slot for accessories (90) may be directly established in a saucer (80), and may be prepared indirectly.

[0014] Specifically, the slot for accessories (90) can be directly established in the side plate (82) of a saucer (80), and a clip (100) can be formed in a saucer (80), and the slot for accessories (90) can also be established in this clip (100). Moreover, if it is when establishing the slot for accessories (90) in the side plate (82) of a saucer (80) directly, the slot for accessories (90) may be formed so that it may penetrate from the upper surface of the side plate (82) of a saucer (80) to the undersurface, and you may form the slot for accessories (90) so that it may not penetrate up to the undersurface of a side plate (82).

[0015] Moreover, this slot for accessories (90) may be prepared so that even a left end may be arrived at from the right end of a saucer (80), and you may prepare it only near the right end of a saucer (80). Moreover, only one of the slot for accessories of this (90) may be prepared in a saucer (80), and it may be established in a saucer (80). [ two or more ] Moreover, if it is when two saucers (80) are

prepared up and down like a pachinko machine, the slot for accessories (90) may be established in one saucer (80), and the slot for accessories (90) may be established in both saucers (80).

[0016] Thus, although the bill, the coin, the prepaid card, etc. are prepared at hand and it enables it to advance a game smoothly by establishing the slot for accessories (90) in a saucer (80), and enabling it to insert accessories, such as a bill, a coin, and a prepaid card, into this slot for accessories (90), it can avoid barring a check by looking of display, the game face of a board, etc.

[0017] Moreover, if it is when game machines (10), such as a slot machine and a pachinko machine, perform a game over a long time comparatively, a game person may leave a seat temporarily in the middle of a game for a meal etc. In such a case, in order to tell others about being temporary \*\*\*\*, generally putting a medal, a writer, etc. into a saucer (80) conventionally was performed. However, it was unclear that it was temporary \*\*\*\* only by putting the medal, the writer, etc. into the saucer (80). Then, it can be made intelligible that it is temporary \*\*\*\* by establishing the slot for accessories (90) in a saucer (80), and enabling it to insert into this slot for accessories (90) the card which specified that they were a medal and temporary \*\*\*\*.

[0018] Invention according to claim 2 is added to the feature of invention according to claim 1 again. (Claim 2) The aforementioned saucer (80) It has a bottom plate (81) and the side plate (82) which projects towards the upper part from the circumference of this bottom plate (81). the aforementioned slot for accessories (90) While being formed so that it may penetrate from the upper surface of a side plate (82) to the undersurface, to the inner skin of the slot for accessories (90) It is characterized by preparing much salients (91) for the accessories inserted from opening of the slot (90) top for accessories passing through the slot for accessories (90), and making it not fall from opening of the slot (90) bottom for accessories.

[0019] Here, the saucer (80) has the bottom plate (81) and the side plate (82) which projects towards the upper part from the circumference of this bottom plate (81). And the slot for accessories (90) is directly established in the side plate (82) of a saucer (80). Thus, it can make it possible to be managed even if it does not increase part mark in establishing the slot for accessories (90) in a saucer (80) by establishing the slot for accessories (90) in the side plate (82) of a saucer (80) directly.

[0020] Moreover, the slot for accessories (90) is formed so that it may penetrate from the upper surface of a side plate (82) to the undersurface. Thus, by making the slot for accessories (90) penetrate from the upper surface of a side plate (82) to the undersurface, dust, dust, etc. can be prevented from collecting in the slot for accessories (90), and, thereby, the time and effort of cleaning can be saved.

[0021] Furthermore, much salients (91) for the accessories inserted from opening of the slot (90) top for accessories passing through the slot for accessories (90), and making it not fall from opening of the slot (90) bottom for accessories are prepared



in the inner skin of the slot for accessories (90). Here, "a salient (91)" is for the accessories inserted in the slot for accessories (90) passing through the slot for accessories (90), and making it not fall.

[0022] Therefore, the position of a salient (91), a size, a number, an interval, etc. are suitably defined according to the length of the slot for accessories (90), width of face, the depth, etc. Thus, by preparing much salients (91) for the accessories inserted in the inner skin of the slot for accessories (90) from opening of the slot (90) top for accessories passing through the slot for accessories (90), and making it not fall from opening of the slot (90) bottom for accessories. Although it is made for neither dust nor dust to collect in the slot for accessories (90), accessories, such as a bill, a coin, and a prepaid card, can be prevented from falling from opening of the slot (90) bottom for accessories.

[0023] (Claim 3) In addition to the feature of invention according to claim 1 or 2, invention according to claim 3 is characterized by being formed so that the width of face may become gradually narrow towards the direction of the back where, as for the aforementioned slot for accessories (90), opening to the accessories with which accessories are inserted are inserted again. Here, "opening in which accessories are inserted" means opening of the side in which accessories are inserted.

[0024] For example, when it is formed so that the slot for accessories (90) may penetrate from the upper surface of a side plate (82) to the undersurface, and opening of the slot for accessories (90) is prepared for the both sides of the upper surface of a side plate (82), and the undersurface, opening prepared in the upper surface of a side plate (82) turns into opening in which accessories are inserted. Moreover, "the direction of the back where accessories are inserted" means the direction of the back to which the accessories inserted from opening go.

[0025] For example, when it is formed so that the slot for accessories (90) may penetrate from the upper surface of a side plate (82) to the undersurface, and opening of the slot for accessories (90) is prepared for the both sides of the upper surface of a side plate (82), and the undersurface, the slot (90) bottom for accessories serves as the direction of the back where accessories are inserted. Thus, it can make it possible to insert certainly various accessories, such as a bill, a coin, a prepaid card, etc. with which thickness differs, from opening in which accessories are inserted by forming towards the direction of the back where accessories are inserted, so that the width of face of the slot for accessories (90) may become narrow gradually.

[0026] (Claim 4) In addition to the feature of invention according to claim 1, invention according to claim 4 is characterized by forming the clip (100) for inserting accessories into the aforementioned saucer (90), and preparing the slot for accessories (90) which is a slot for inserting accessories into this clip (100) again.

[0027] That is, the game machine (10) concerning this invention forms a clip (100) in a saucer (90), establishes the slot for accessories (90) in this clip (100), is stuck for it, and establishes the slot for accessories (90) in a saucer (90) indirectly. Thus,

although part mark increase by forming the clip (100) for inserting accessories into a saucer (90), and establishing the slot for accessories in this clip (100), it can make it possible to use the conventional game machine in a form as it is.

[0028] Invention according to claim 5 is further added to the feature of invention according to claim 4. (Claim 5) The aforementioned saucer (80) It has a bottom plate (81) and the side plate (82) which projects towards the upper part from the circumference of this bottom plate (81). the aforementioned clip (100) It has the scissors section (101) for inserting accessories, and the stop section (102) stopped by the side plate (82). The slot for accessories (90) which is a slot for inserting accessories into the aforementioned scissors section (101) is prepared, and the aforementioned stop section (102) is characterized by being formed in a side plate (82) free [ attachment and detachment ].

[0029] Thus, when dust, dust, etc. have collected in the slot for accessories (90) by forming a clip (100) in a saucer (80) free [ attachment and detachment ], a clip (100) is removed from a saucer (80) and it can make it possible to clean the inside of the slot for accessories (90) easily.

[0030]

[Embodiments of the Invention] (Gestalt of the 1st operation)

(Explanation of a drawing) Drawing 1 or drawing 6 shows the gestalt of the 1st operation. The plan of the slot 90 for accessories of the game machine 10 which the important section cross section, drawing 4 , and drawing 5 of a saucer 80 of the game machine 10 which the appearance perspective diagram of the saucer 80 of the game machine 10 which the appearance front view of the game machine 10 which drawing 1 requires for the gestalt of this operation, and drawing 2 require for the gestalt of this operation, and drawing 3 require for the gestalt of this operation require for the gestalt of this operation, and drawing 6 are the appearance perspective diagrams of the saucer 80

[0031] (Game machine 10) As shown in drawing 1 , the game machine 10 was equipped with the square box-like case 20, and is equipped with three rotation reels 30 formed in the interior of this case 20 lining up side-by-side. That is, the game machine 10 concerning the gestalt of this operation is a slot machine. Moreover, a front panel 21 is formed in the front face of a case 20, and the pattern display window 22 is formed in the center of a simultaneously of a front panel 21. Moreover, under the pattern display window 22, medal input port 40, the start switch 51, the stop switch 52, the bed switch 53, the settlement-of-accounts switch 54, etc. are formed. Moreover, display, such as a liquid crystal display 61 and the 7 segment Light Emitting Diode 62, is prepared in the circumference of the pattern display window 22. Moreover, the expenditure mouth 70 is formed in the lower part of a front panel 21, and the saucer 80 is formed in it under the expenditure mouth 70. Moreover, the slot 90 for accessories which is a slot for inserting accessories is established in the saucer 80.

[0032] That is, the game machine 10 concerning the gestalt of this operation

establishes the slot 90 for accessories in a saucer 80 directly.

(Medal input port 40) Medal input port 40 is for throwing in a medal, and as shown in drawing 1 , it is prepared in the method of the diagonal below of the pattern display window 22.

[0033] (Start switch 51) The start switch 51 is for making rotation of each rotation reel 30 start, and as shown in drawing 1 , it is formed in the method of the diagonal below of the pattern display window 22. And if this start switch 51 is operated, rotation of all three rotation reels 30 will begin.

[0034] (Stop switch 52) The stop switch 52 is for stopping rotation of each rotation reel 30, and as shown in drawing 1 , each one rotation reel 30 of every is formed caudad. And if the stop switch 52 with which the left-hand side rotation reel 30 is formed caudad operates, rotation of the left-hand side rotation reel 30 will stop, if the stop switch 52 with which the central rotation reel 30 is formed caudad is operated, rotation of the central rotation reel 30 will stop, and if the stop switch 52 with which the right-hand side rotation reel 30 is formed caudad operates, rotation of a right-hand side rotation reel 30 will stop.

[0035] (Bed switch 53) The bed switch 53 is for reducing the number of sheets of the medal by which the credit is carried out, and replacing with an injection of a medal, and as shown in drawing 1 , it is formed in the method of the diagonal below of the pattern display window 22.

(Settlement-of-accounts switch 54) The settlement-of-accounts switch 54 is for paying out the medal by which the credit is carried out, and as shown in drawing 1 , it is formed in the method of the diagonal below of the pattern display window 22.

[0036] (Liquid crystal display 61) A liquid crystal display 61 is for telling a game person about success in an election or winning a prize, and as shown in drawing 1 , it is prepared in the method of the right of the pattern display window 22.

((Light Emitting Diode) 7 segment 62) The 7 segment Light Emitting Diode 62 is for telling a game person about injection number of sheets, reservoir number of sheets, etc. of a medal, and as shown in drawing 1 , two or more pattern display 22 is formed caudad.

[0037] (Expenditure mouth 70) The expenditure mouth 70 is for paying out a medal, and as shown in drawing 1 , it is prepared in the lower part of a front panel 21.

(Saucer 80) A saucer 80 is for catching and storing the medal paid out of the expenditure mouth 70, and as shown in drawing 1 , the expenditure mouth 70 is formed caudad.

[0038] This saucer 80 is formed in the core box which has opening to the up side. Specifically, this saucer 80 has the bottom plate 81 and the side plate 82 which projects towards the upper part from the circumference of this bottom plate 81. Moreover, it sees from a game person among side plates 82, and the near-side side plate 83 is in a near side, and it sees from a game person and the right-hand side side plate 84 is in right-hand side, and it sees from a game person and the left-hand side side plate 85 is in left-hand side.

[0039] (Slot 90 for accessories) The slot 90 for accessories is a slot for inserting accessories, and as shown in drawing 1 and drawing 2 , it is established in the saucer 80. Specifically, this slot 90 for accessories is formed near the right end of the near-side side plate 83, as shown in drawing 1 and drawing 2 . Moreover, this slot 90 for accessories is directly established in the near-side side plate 83.

[0040] Moreover, as shown in drawing 1 and drawing 2 , this slot 90 for accessories is formed so that it may penetrate from the upper surface of the near-side side plate 83 to an inferior surface of tongue, and, thereby, has opening to the both sides of the upper surface of the near-side side plate 83, and an inferior surface of tongue. And while accessories are inserted from upper opening, as for this slot 90 for accessories, dust, dust, etc. fall from lower opening.

[0041] Moreover, as shown in drawing 3 and drawing 4 , much salients 91 for the accessories inserted from opening of the slot 90 top for accessories passing through the slot 90 for accessories, and making it not fall from opening of the slot 90 bottom for accessories are formed in the inner skin of this slot 90 for accessories. Moreover, as shown in drawing 4 , the salient 91 is formed so that the inner skin of the both sides of the slot 90 for accessories may be connected. Moreover, the interval of salient 91 is formed more narrowly than the width of face of accessories, such as a bill, a coin, and a prepaid card.

[0042] Moreover, towards lower opening, as shown in drawing 3 , this slot 90 for accessories is formed from upper opening so that the width of face may become narrow gradually. That is, from opening in which accessories are inserted, towards the direction of the back where accessories are inserted, this slot 90 for accessories is formed so that the width of face may become narrow gradually. In addition, salient 91 should just be formed so that the accessories inserted from opening of the slot 90 top for accessories may pass through the slot 90 for accessories and may not fall from opening of the slot 90 bottom for accessories. Therefore, as it is not restricted when being formed so that the inner skin of the both sides of the slot 90 for accessories may be connected as shown in drawing 4 , for example, shown in drawing 5 , salient 91 can also be formed so that it may be made to project by turns towards the inner skin of another side from one inner skin of the slot 90 for accessories.

[0043] Thus, even if there is no way between a front panel 21 and medal input port 40, as the game machine 10 concerning the form of this operation establishes the slot 90 for accessories in a saucer 80, and enables it to insert a bill, a coin, a prepaid card, etc. into this slot 90 for accessories, and a bill, a coin, a prepaid card, etc. can be managed by this by it, it is made not to bar a check by looking of display, such as the 7 segment Light Emitting Diode 62.

[0044] Moreover, in the game machine 10 concerning the form of this operation, in case a game person leaves a seat temporarily in the middle of a game for a meal etc., the card which specified that they were a medal and temporary \*\*\*\* can be inserted into the slot 90 for accessories established in the saucer 80, and, thereby, it can be

made intelligible that it is temporary \*\*\*\*. Moreover, in case the game machine 10 concerning the form of this operation establishes the slot 90 for accessories in a saucer 80 by establishing the slot 90 for accessories in the side plate 82 of a saucer 80 directly, even if it does not increase part mark, it enables it to be managed.

[0045] Moreover, when the game machine 10 concerning the form of this operation makes the slot 90 for accessories penetrate from the upper surface of a side plate 82 to the undersurface, it is made for neither dust nor dust to collect in the slot 90 for accessories. The game machine 10 concerning the form of this operation moreover, to the inner skin of the slot 90 for accessories By forming much salients 91 for the accessories inserted from opening of the slot 90 top for accessories passing through the slot 90 for accessories, and making it not fall from opening of the slot 90 bottom for accessories Although it is made for neither dust nor dust to collect in the slot 90 for accessories, it is made for accessories, such as a bill, a coin, and a prepaid card, not to fall from opening of the slot 90 bottom for accessories.

[0046] Furthermore, the game machine 10 concerning the form of this operation enables it to insert certainly various accessories, such as a bill, a coin, a prepaid card, etc. with which thickness differs, from opening in which accessories are inserted by forming towards the direction of the back where accessories are inserted, so that the width of face of the slot 90 for accessories may become narrow gradually. In addition, you may prepare [ prepare / further / may form so that even a left end may be arrived at from the right end of the near-side side plate 83, as the slot 90 for accessories is shown in drawing 6 , although only one was prepared near the right end of the near-side side plate 83 as the form of this operation showed the slot 90 for accessories to drawing 1 and drawing 2 , and / in the right-hand side side plate 84 or the left-hand side side plate 85 ] more than one.

[0047] Moreover, the game machine 10 may not be restricted to a slot machine, and may be a pachinko machine etc. Moreover, if it is when two saucers 80 are formed up and down like a pachinko machine, the slot 90 for accessories may be established only in one saucer 80, and the slot 90 for accessories may be established in both saucers 80.

[0048] (Form of the 2nd operation)

(Explanation of a drawing) Drawing 7 and drawing 8 show the form of the 2nd operation. The appearance perspective diagram of the saucer 80 of the game machine 10 which drawing 7 requires for the form of this operation, and drawing 8 are the important section cross sections of the saucer 80 of the game machine 10 concerning the form of this operation.

[0049] (Game machine 10) As shown in drawing 7 , the game machine 10 concerning the form of this operation forms a clip 100 in a saucer 80, and establishes the slot 90 for accessories in this clip 100, namely, establishes the slot 90 for accessories in a saucer 80 indirectly. In addition, the game machine 10 concerning the form of this operation is the same as that of the form of the 1st operation except the point of

having formed the clip 100 in the saucer 80 and having established the slot 90 for accessories in this clip 100.

[0050] (Clip 100) A clip 100 is for establishing the slot 90 for accessories in a saucer 80. As shown in drawing 7 and drawing 8, this clip 100 is formed in cross-section serpentine, and has the scissors section 101 for inserting accessories, and the stop section 102 stopped by the side plate 82.

[0051] Moreover, as shown in drawing 7 and drawing 8, the slot 90 for accessories which is a slot for inserting accessories is established in the scissors section 101. Moreover, as shown in drawing 7 and drawing 8, the stop section 102 is formed in the shape of a hook, and is formed in the near-side side plate 83 of a saucer 80 possible [ a stop ]. Thereby, the attachment and detachment of a clip 100 on a saucer 80 are enabled.

[0052] Furthermore, as shown in drawing 8, while the semi-sphere-like salient [ engagement ] 103 is formed in the predetermined position of the stop section 102, the semi-sphere-like engagement hole 104 is established in the predetermined position of the near-side side plate 83. And if the predetermined position of the near-side side plate 83 of a saucer 80 is made to stop the stop section 102 of a clip 100, the engagement salient 103 and the engagement hole 104 will be engaged.

Thereby, in the grade which takes out and inserts accessories, such as a bill, a coin, and a prepaid card, into the slot 90 for accessories, the clip 100 is made to move to a longitudinal direction or not to separate simply [ a clip 100 ] from the near-side side plate 83 along with the near-side side plate 83.

[0053] Thus, the game machine 10 concerning the gestalt of this operation forms the clip 100 for inserting accessories into a saucer 90, the slot for accessories is established in this clip 100, and although part mark increase, they enable it to use the conventional game machine in a form as it is by this. Moreover, when dust, dust, etc. have collected in the slot 90 for accessories by forming a clip 100 in a saucer 80 free [ attachment and detachment ], the game machine 10 concerning the gestalt of this operation removes a clip 100 from a saucer 80, and enables it to clean the inside of the slot 90 for accessories easily.

[0054] In addition, with the gestalt of this operation, a clip 100 may form two or more clips 100, although only one was prepared near the right end of the near-side side plate 83 as shown in drawing 7. Moreover, the game machine 10 may not be restricted to a slot machine, and may be a pachinko machine etc. Moreover, if it is when two saucers 80 are formed up and down like a pachinko machine, a clip 100 may be formed only in one saucer 80, and the slot 90 for accessories may be established in this clip 100, and a clip 100 may be formed in both saucers 80, and the slot 90 for accessories may be established in each clip 100.

[0055]

[Effect of the Invention] Since the slot for accessories was established in the saucer according to invention according to claim 1 as explained above, accessories, such as a bill, a coin, and a prepaid card, can be inserted into this slot for

accessories. (Claim 1) By this The bill, the coin, the prepaid card, etc. are prepared at hand, and although it enables it to advance a game smoothly, the game machine with which a check by looking of display, the game face of a board, etc. is not barred can be offered.

[0056] (Claim 2) According to invention according to claim 2, from having established the slot for accessories in the side plate of a saucer directly again While not increasing part mark and making the slot for accessories penetrate from the upper surface of a side plate to an inferior surface of tongue further in establishing the slot for accessories in a saucer Since much salients were prepared in the inner skin of the slot for accessories, although it is made for neither dust nor dust to collect on Mizouchi for accessories, accessories, such as a bill, a coin, and a prepaid card, can offer the game machine which does not fall from opening of the slot bottom for accessories.

[0057] (Claim 3) Since according to invention according to claim 3 it formed towards the direction of the back where accessories are inserted from opening in which accessories are inserted again so that the width of face of the slot for accessories might become narrow gradually, the game machine which can sandwich certainly various accessories, such as a bill, a coin, a prepaid card, etc. with which thickness differs, can be offered.

[0058] (Claim 4) According to invention according to claim 4, since the clip for inserting accessories into a saucer was formed and the slot for accessories was established in this clip, although part mark increase, they can offer the game machine which can use the conventional game machine in a form as it is again.

[0059] (Claim 5) Further, according to invention according to claim 5, since the clip was formed in the saucer free [ attachment and detachment ], when dust, dust, etc. have collected on Mizouchi for accessories, the game machine which removes a clip from a saucer and can clean Mizouchi for accessories easily can be offered.

---

[Translation done.]

**\* NOTICES \***

**Japan Patent Office is not responsible for any damages caused by the use of this translation.**

1.This document has been translated by computer. So the translation may not reflect the original precisely.

2.\*\*\*\* shows the word which can not be translated.

3.In the drawings, any words are not translated.

---

**DESCRIPTION OF DRAWINGS**

---

[Brief Description of the Drawings]

[Drawing 1] Appearance front view of the game machine concerning the gestalt of the 1st operation.

[Drawing 2] The appearance perspective diagram of the saucer of the game machine concerning the gestalt of the 1st operation.

[Drawing 3] The important section cross section of the saucer of the game machine concerning the gestalt of the 1st operation.

[Drawing 4] The plan of the slot for accessories of the game machine concerning the gestalt of the 1st operation.

[Drawing 5] The plan of the slot for accessories of the game machine concerning the gestalt of the 1st operation.

[Drawing 6] The appearance perspective diagram of the saucer of the game machine concerning the gestalt of the 1st operation.

[Drawing 7] The appearance perspective diagram of the saucer of the game machine concerning the gestalt of the 2nd operation.

[Drawing 8] The important section cross section of the saucer of the game machine concerning the gestalt of the 2nd operation.

[Description of Notations]

10 Game Machine 20 Case

21 Front Panel 22 Pattern Display Window

30 Rotation Reel 40 Medal Input Port

51 Start Switch 52 Stop Switch

53 Bed Switch 54 Liquidation Switch

61 Liquid Crystal Display 62 7 Segment Light Emitting Diode

70 Expenditure Mouth 80 Saucer

81 Bottom Plate 82 Side Plate

83 Near-Side Side Plate 84 Right-hand Side Side Plate

85 Left-hand Side Side Plate 90 Slot for Accessories

91 Salient 100 Clip

101 Scissors Section 102 Stop Section

103 Engagement Salient 104 Engagement Hole

---

[Translation done.]

**\* NOTICES \***

**Japan Patent Office is not responsible for any damages caused by the use of this translation.**

1.This document has been translated by computer. So the translation may not reflect the original precisely.



2.\*\*\*\* shows the word which can not be translated.


3.In the drawings, any words are not translated.

---


## DRAWINGS

---


[Drawing 2]

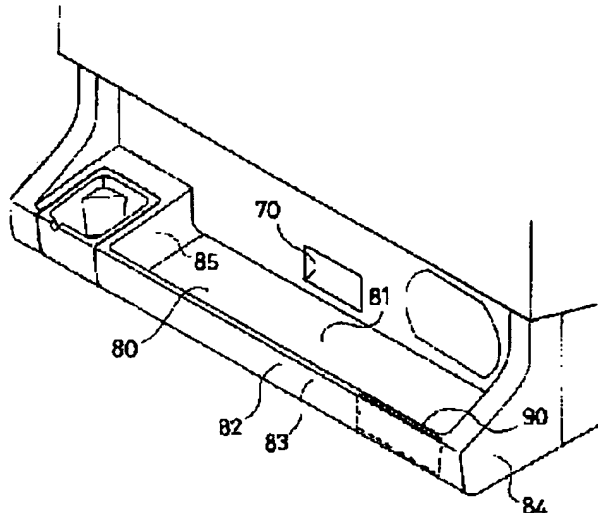


[Drawing 3]

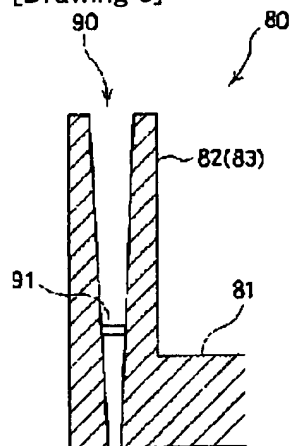


[Drawing 4]

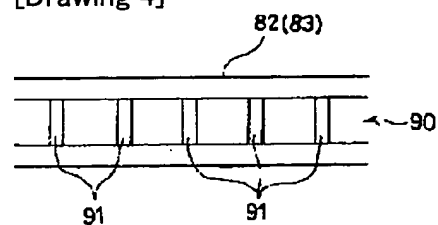


[Drawing 5]

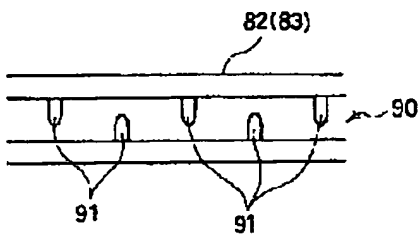


[Drawing 1]

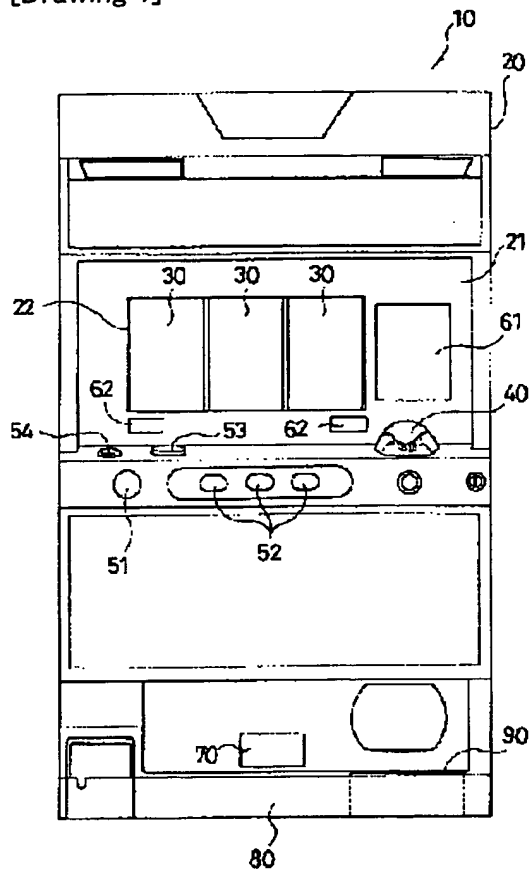


[Drawing 6]

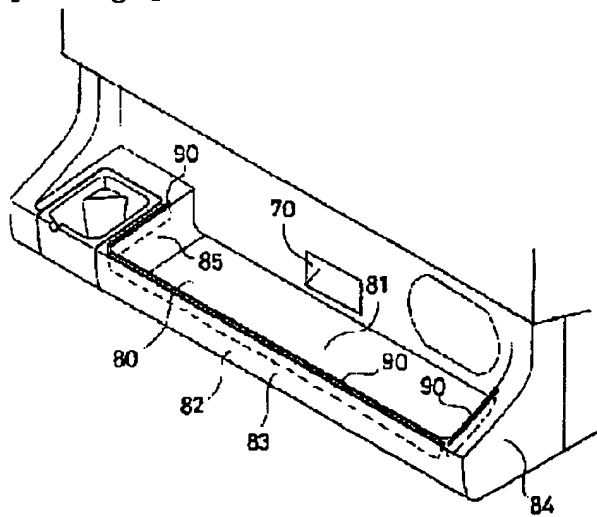

[Drawing 7]

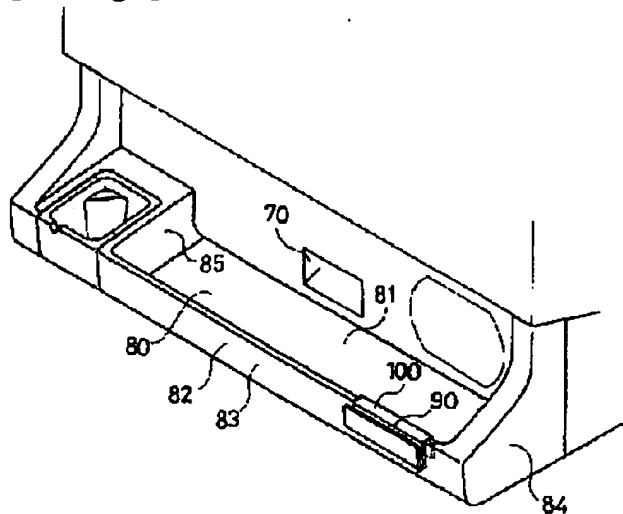

[Drawing 8]

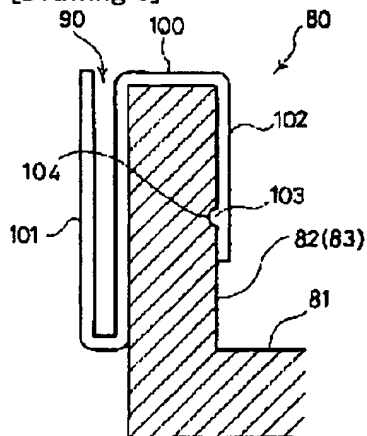

---

[Translation done.]